


整理番号 = P - 2 2 1 0

特願200

Fig. 1

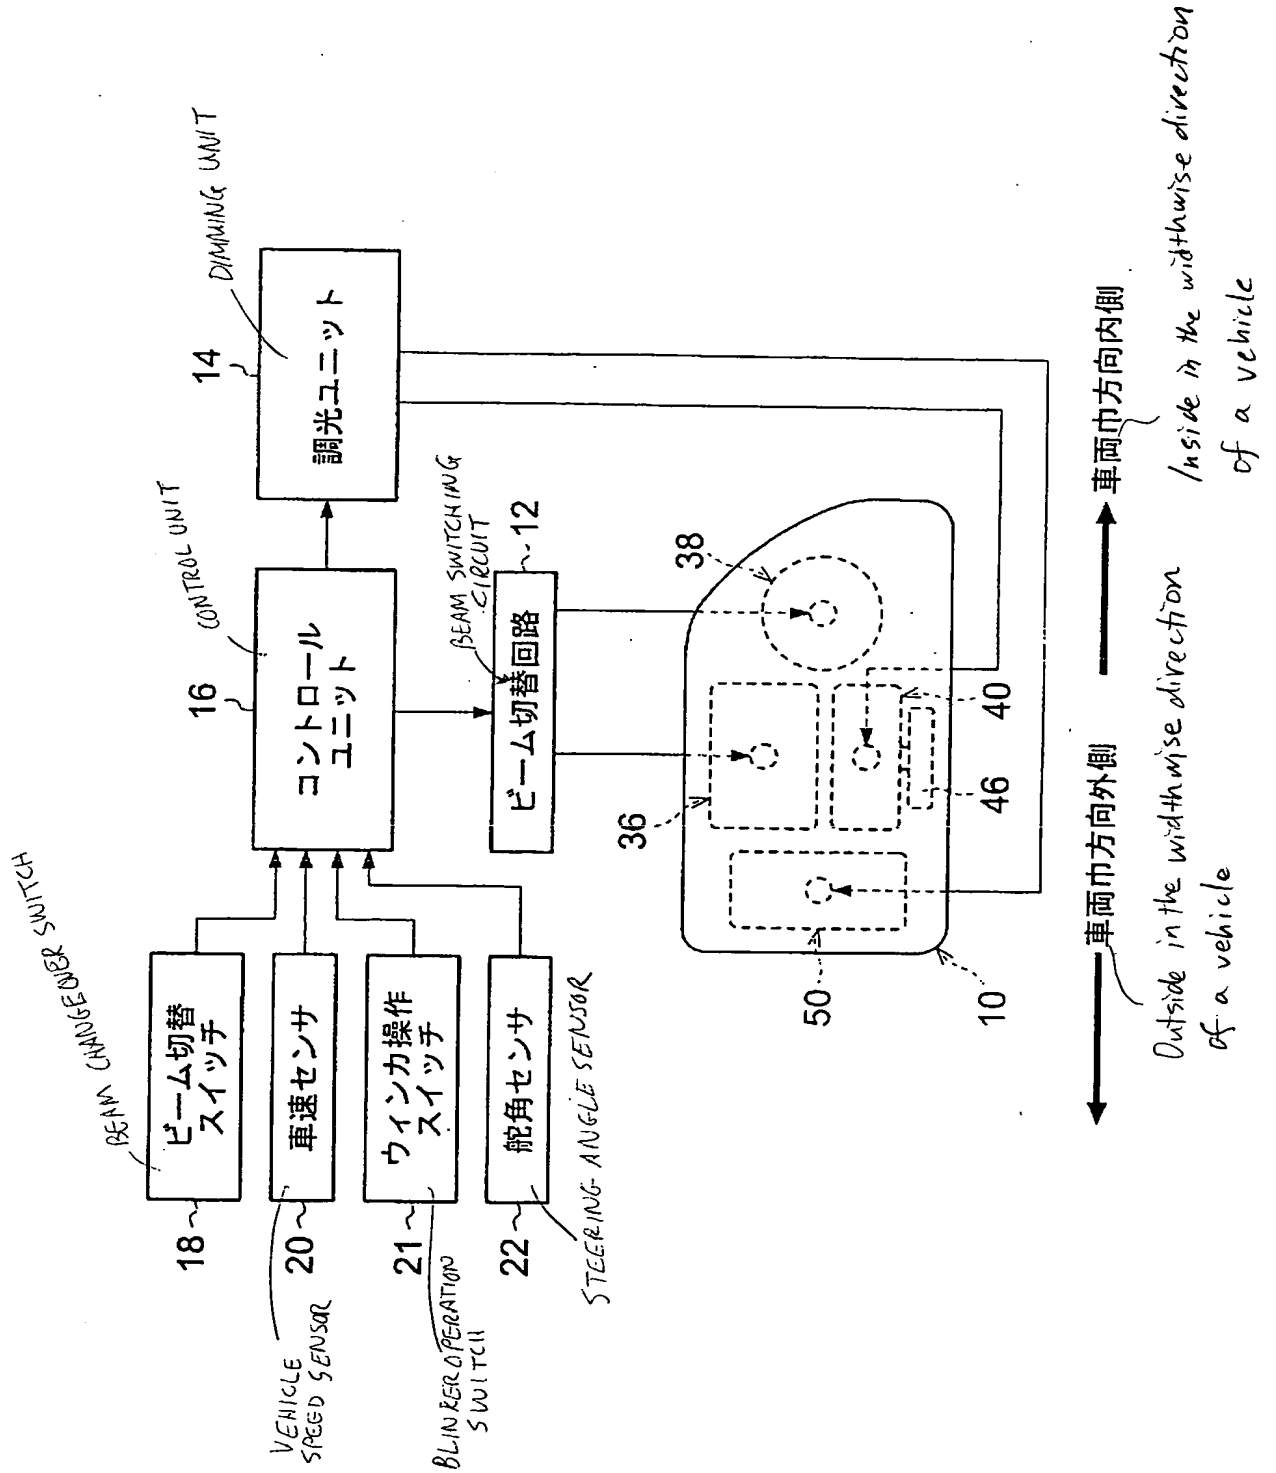

整理番号 = P - 2 2 1 0

特願2003-

Fig. 2

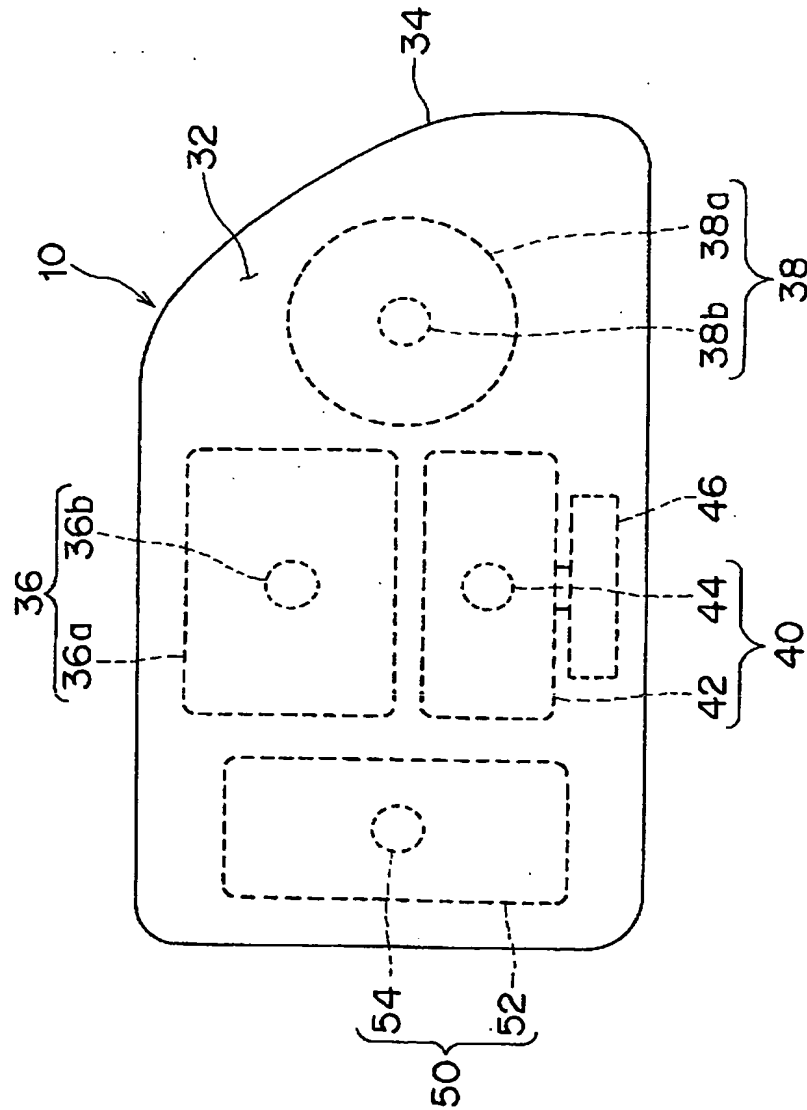


Fig. 3


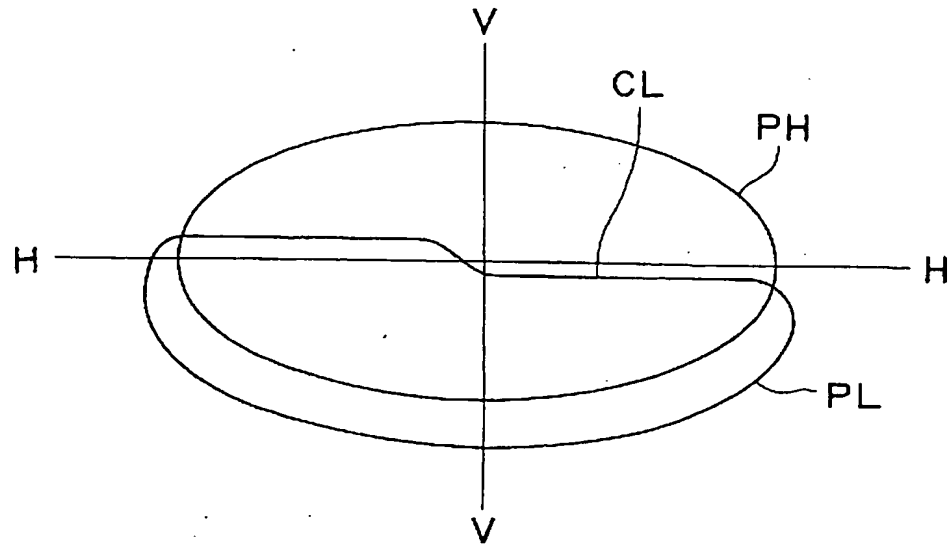


Fig. 4

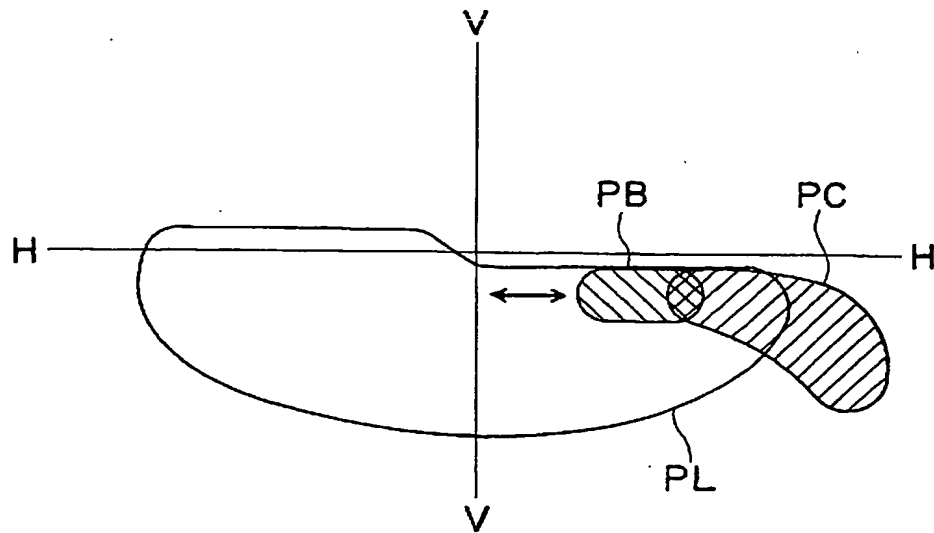

整理番号 = P - 2 2 1 0

特願2001

Fig. 5A


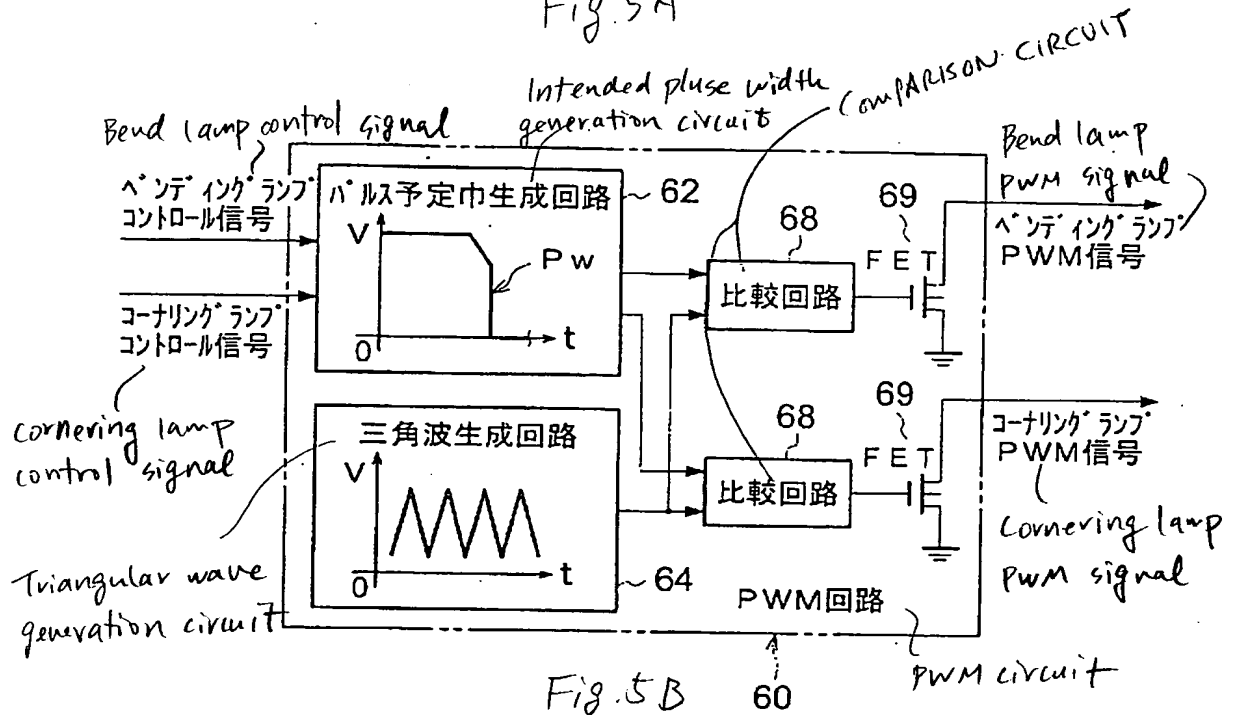



Fig. 5B

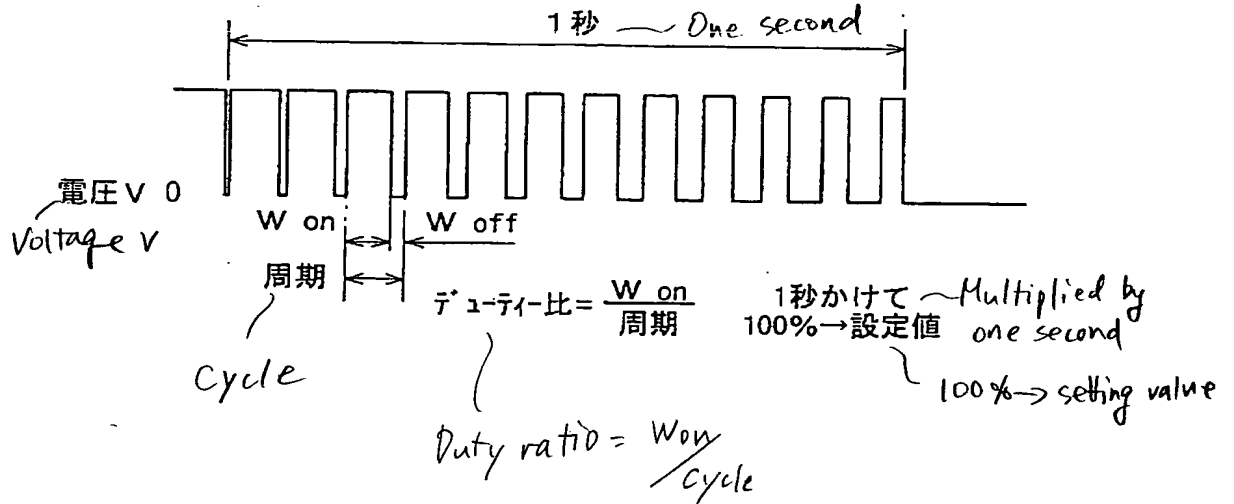

整理番号 = P - 2 2 1 0

特願2003


Fig. 6

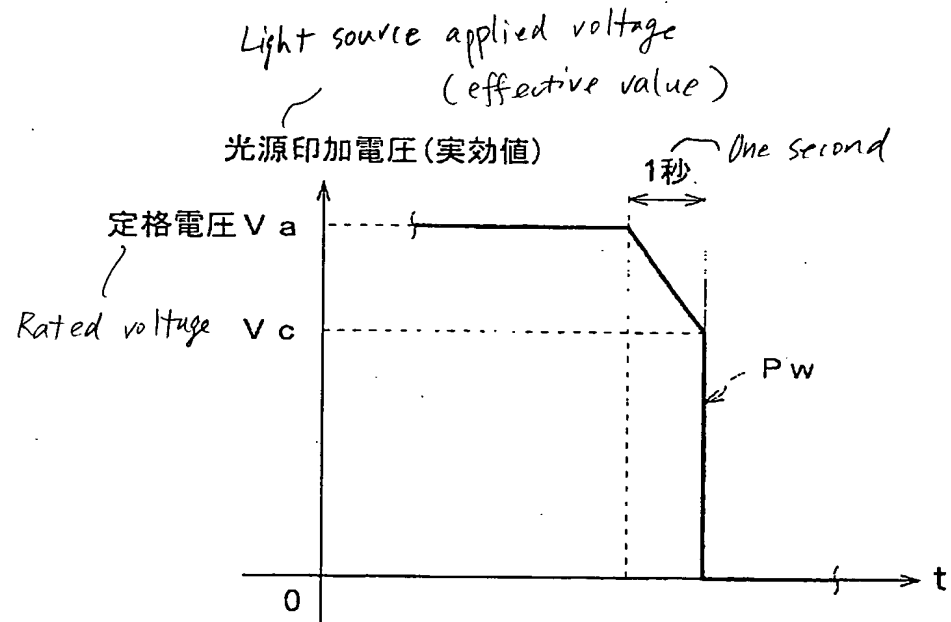

整理番号 = P - 2 2 1 0

特願200


Fig. 7

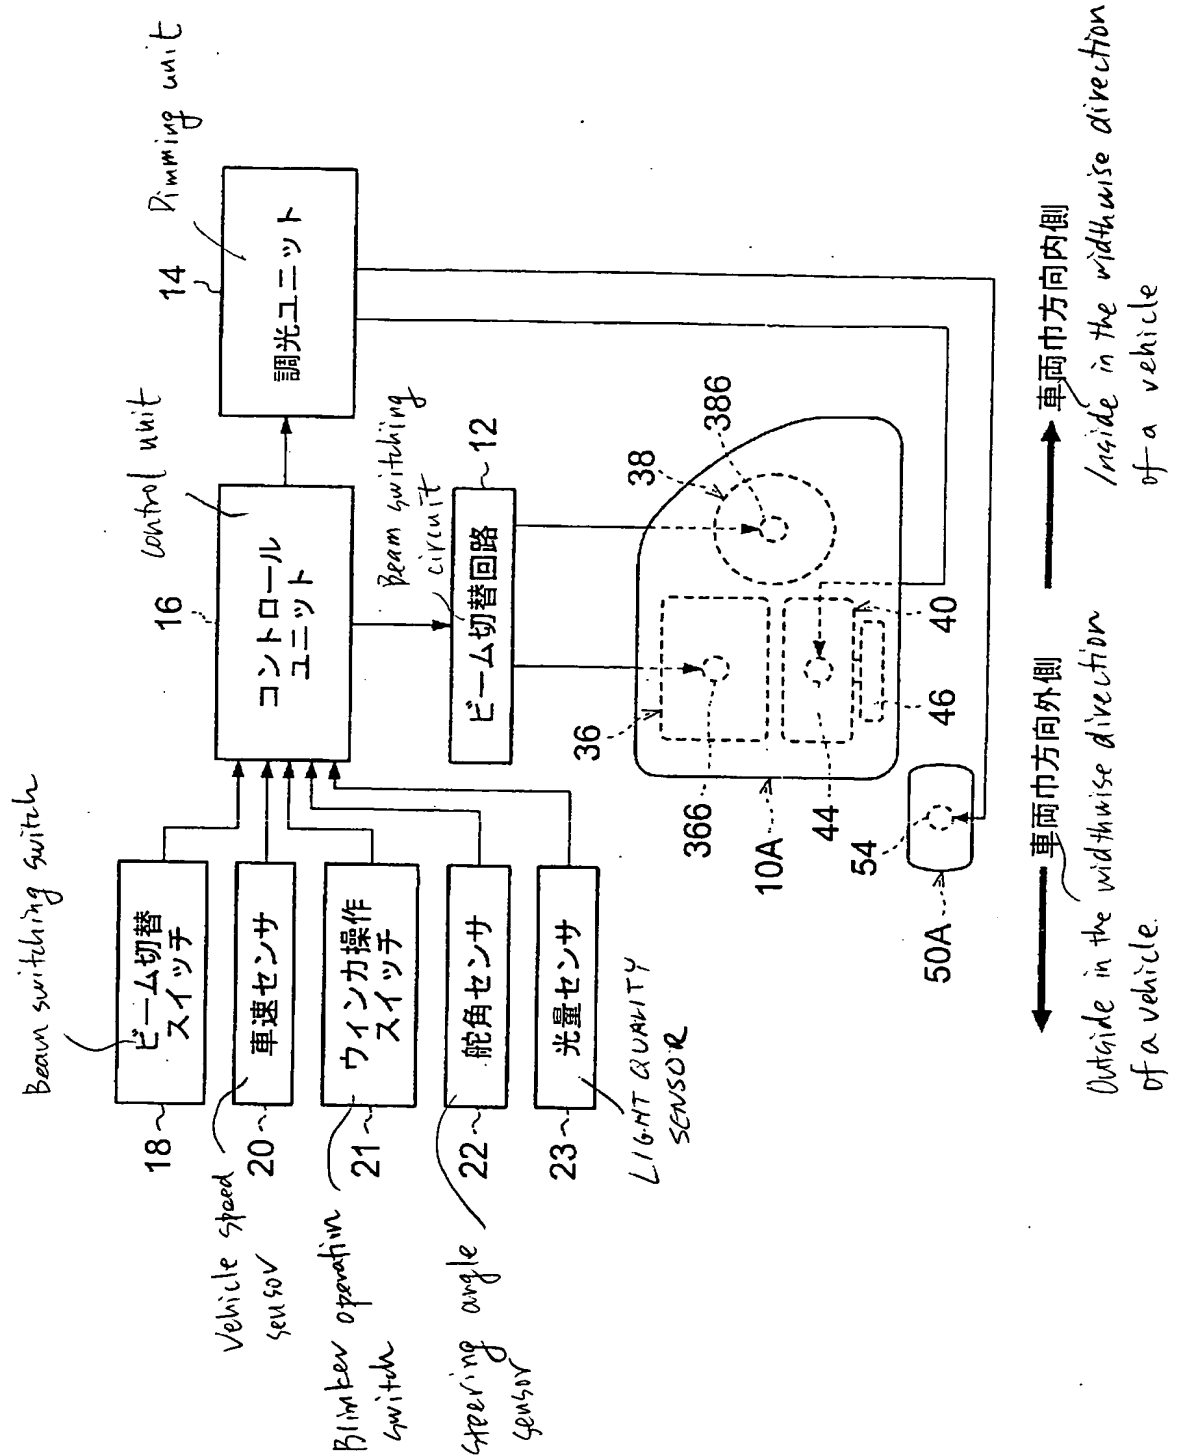

整理番号 = P - 2 2 1 0

特願2003-0

Fig. 8

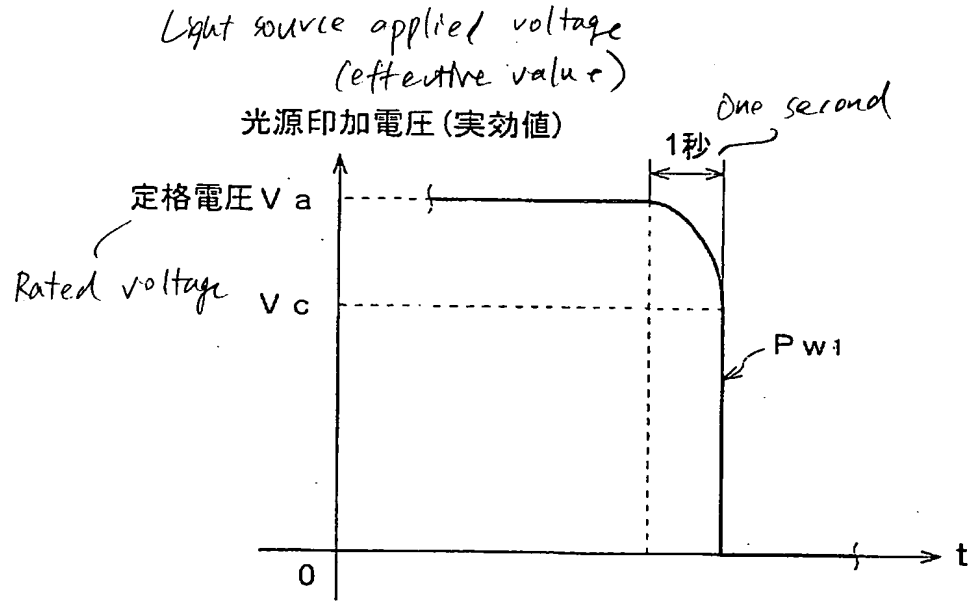

整理番号 = P - 2 2 1 0

特願2003-

Fig. 9

Lighting requirement		Average	max	min	Deformation of filament
点灯条件		平均	max	min	フィラメント変形
連続点灯		619.6	878.8	287.6	なし None
点滅	(a) 調光なし	470.1	559.5	400.4	なし None
	2秒 2 sec.	41.6	50.4	33.2	変形 Deformed
	(b) 1秒 1 sec.	274.8	490.1	114.7	変形 Deformed
	0.5秒 0.5 sec.	420.2	679.2	298.8	変形 Deformed
(d) 段階調光		486.6	638.5	393.3	なし None
(c) 電圧切替 Voltage switching	14/6V	254.3	499.0	79.6	変形 Deformed
	14/7V	38.9	49.9	26.7	変形 Deformed
	14/8V	18.9	25.7	6.2	変形 Deformed
	14/9V	62.6	116.6	24.1	変形 Deformed
	14/9.5V	250.0	280.0	138.9	若干変形する
14/10V		514.5	667.0	308.5	現時点なし

Continuous illumination

(a) No dimming

Blinking

Dimming during extinction

Stopwise dimming

None at this time


Slightly deformed

整理番号=P-2210

特願200

日
13

Fig. 10

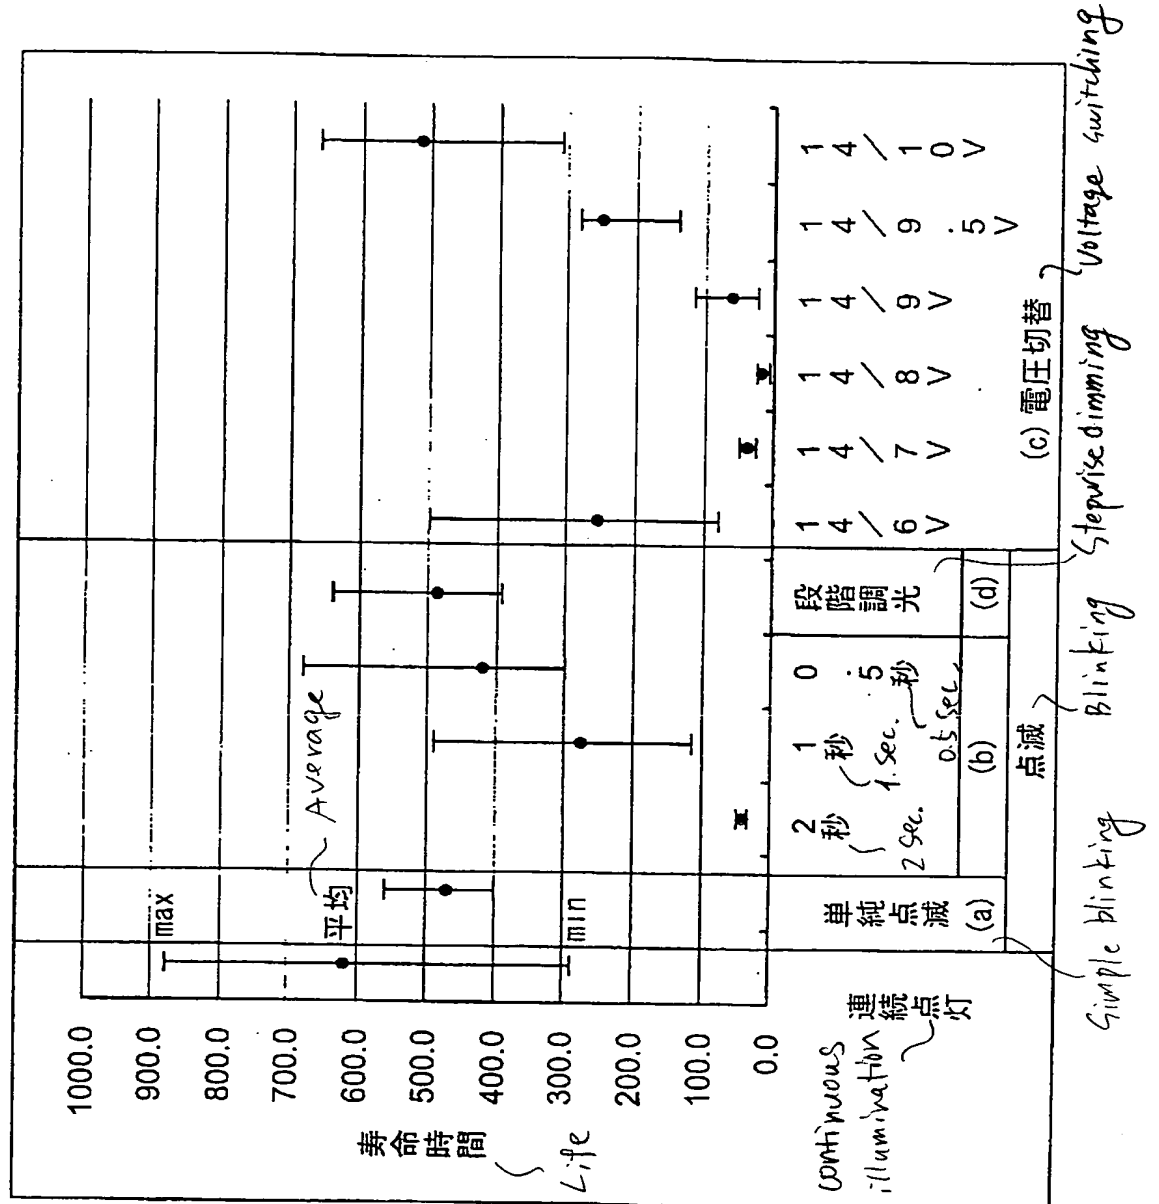

整理番号 = P - 2 2 1 0

特願2003

Fig. 11A

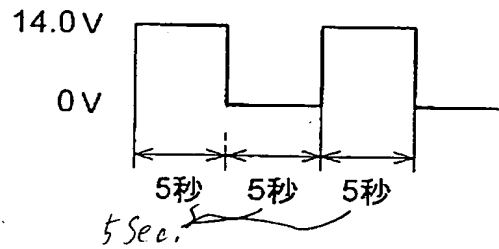


Fig. 11B

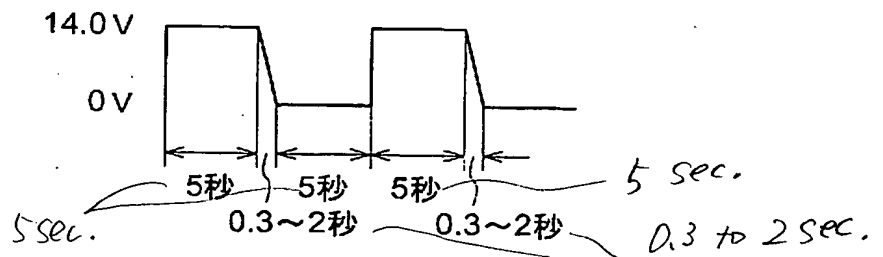


Fig. 11C


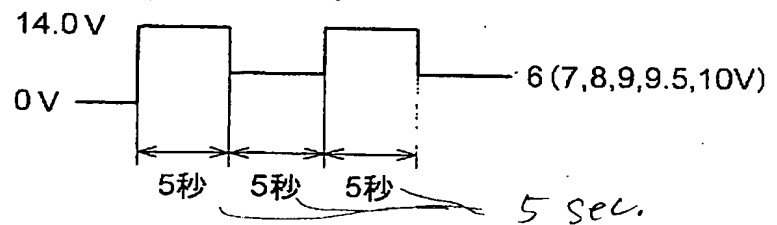


Fig. 11D

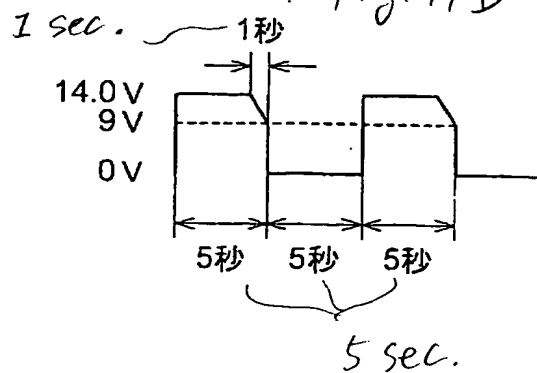

整理番号 = P - 2 2 1 0

特願2003-0

Fig. 12A


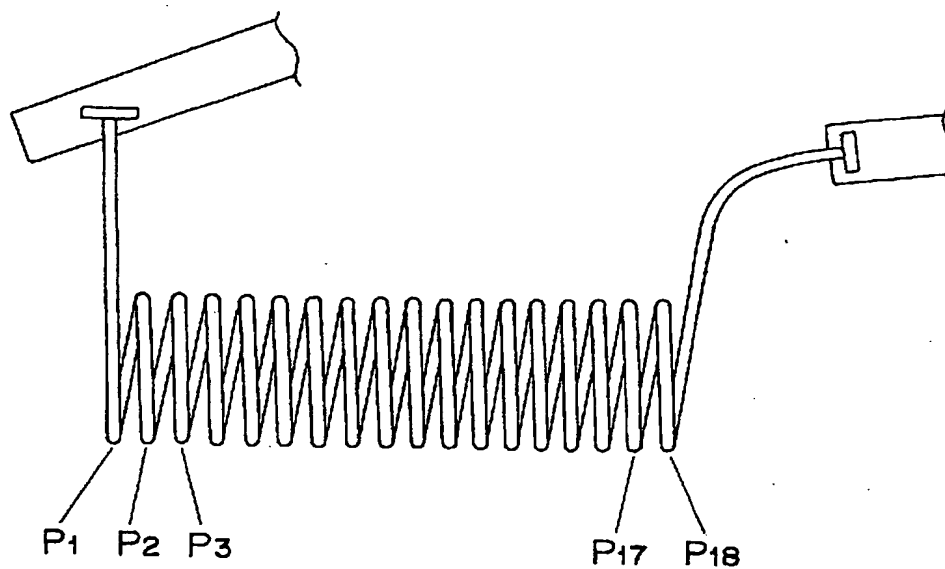


Fig. 12B

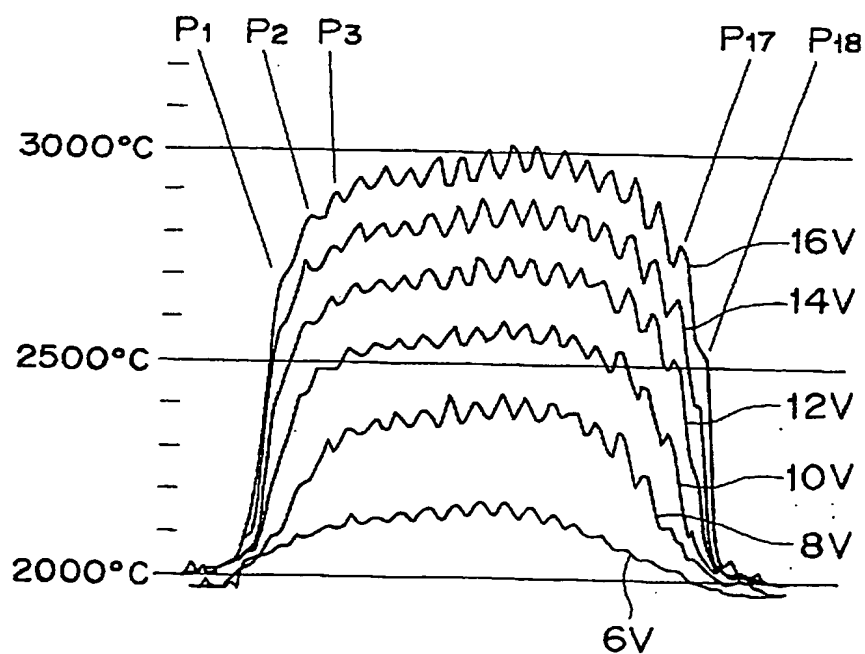

整理番号 = P - 2 2 1 0

特願2003-

Fig. 13A


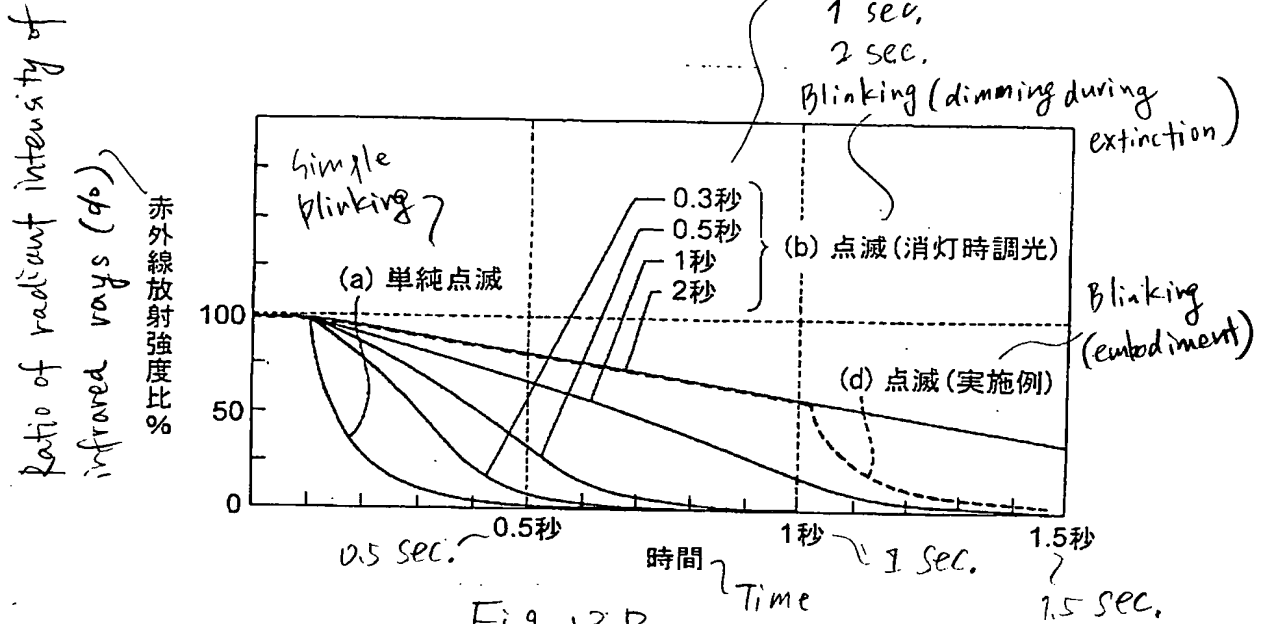


Fig. 13B

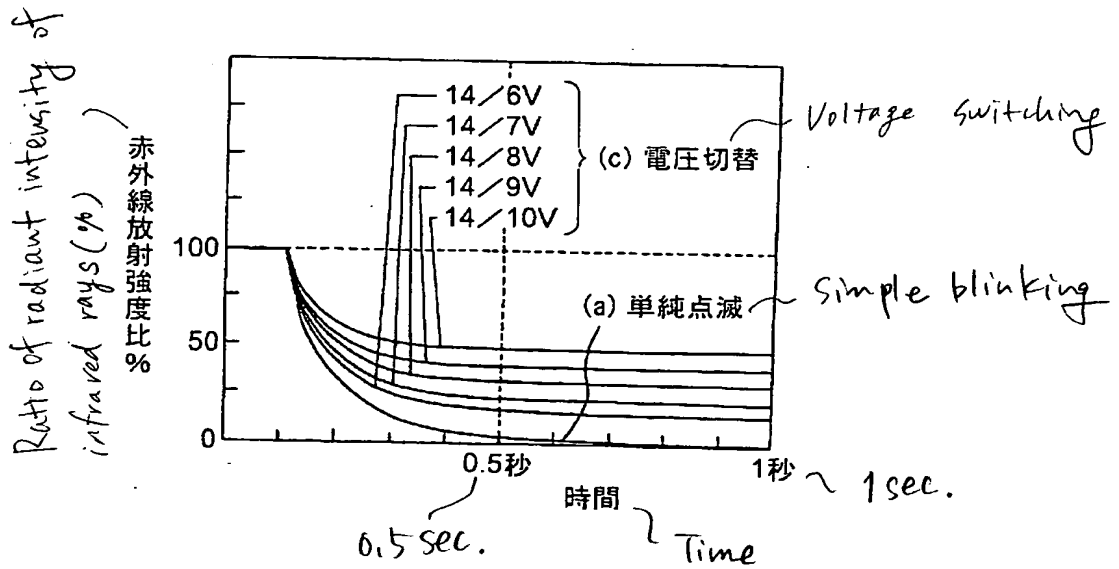

整理番号 = P - 2 2 1 0

特願2003-

Fig. 14A

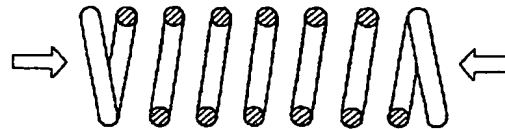


Fig. 14B

